




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6: <b>H04Q 7/38</b>		<b>A1</b>	(11) International Publication Number: <b>WO 96/31077</b>
			(43) International Publication Date: 3 October 1996 (03.10.96)
(21) International Application Number: <b>PCT/SE96/00299</b>		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 7 March 1996 (07.03.96)		<b>Published</b> With international search report. In English translation (filed in Swedish).	
(30) Priority Data: 9501177-1      31 March 1995 (31.03.95)      SE			
(71) Applicant (for all designated States except US): TELEFON-AKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).			
(72) Inventors; and (75) Inventors/Applicants (for US only): TURINA, Dalibor [SE/SE]; Reduttvägen 14D, S-183 67 Täby (SE). BILL-STRÖM, Lars [SE/SE]; Wiboms väg 25, S-171 60 Solna (SE).			
(74) Agents: WILLQUIST, Bo et al.; Albihn Willquist AB, S:t Larsgatan 23, S-582 24 Linköping (SE).			



(54) Title: METHOD AND ARRANGEMENT IN A RADIO COMMUNICATION SYSTEM

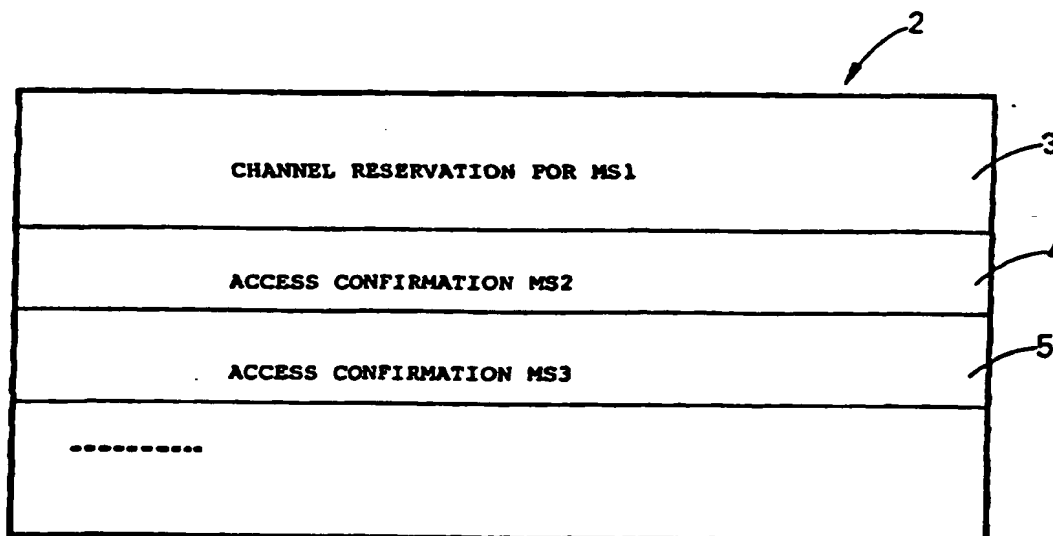

## (57) Abstract

The present invention concerns a process in a radio communication system which is arranged for packet data transmission according to a message-synchronized ALOHA protocol with reservation. Mobile stations in the system are arranged to send access requests to a base station during a reservation phase in a mobile radio system which uses this protocol. The base station is arranged to receive and comply with the access request from a first mobile station by sending thereto a channel reservation message (2) comprising a channel reservation (3). The base station is further arranged to receive access requests from at least a second mobile station for which channel reservation momentarily cannot be carried out. According to the process of the invention an access request received from the second mobile station is confirmed when channel reservation cannot be carried out in the usual manner. The confirmation is sent in the form of an access confirmation (4, 5) which is included in the same channel reservation message (2) as the channel reservation (3) for the first mobile station.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LJ	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

## Method and arrangement in a radio communication system

## TECHNICAL BACKGROUND

The present invention concerns a process for a radio communication system which is arranged for packet data transmission according to a message-synchronized ALOHA protocol with reservation. The invention concerns a process for requesting access in a momentarily overloaded mobile radio system, wherein an access request received in a base station from each station in a first group of mobile stations cannot be responded to by channel reservation for the first group of mobile stations.

The invention also concerns a base station and a mobile station in a radio communication system for packet data transmission.

## PRIOR ART

In the case of mobile radio communication systems for packet data transmission a base station can communicate with a plurality of mobile stations via one or a plurality of time-divided channels between the base station and the mobile stations. A time-divided channel is divided into time slots. A data burst with a number of information bits can be transmitted in each time slot. The mobile stations do not communicate continuously with the base station and a plurality of mobile stations can therefore compete for the same time-divided channel. Channels are allocated dynamically, separately from the channel requirement of the mobile stations and channel allocation is controlled by the base station.

A mobile station announces a channel requirement by sending an access request to the base station. This access request is sent in a reservation phase in the time-divided channel for transmission from the mobile stations to the base station. Different types of protocol can be used in order to control the access request and channel allocation. A conventional protocol in the case of dynamic allocation of time-divided radio channels is a message-synchronized ALOHA protocol with reservation. In the case of this protocol, each packet transmission is preceded by a reservation. A short message with a request for channel reservation is sent at random from a mobile station to a base station. According to the ALOHA reservation protocol, the result of this access request is fed back by the base station giving the mobile station access

to at least part of the time-divided channel.

Since many mobile stations may have a need of packet data transmission, collisions can occur as a result of a number of mobile stations sending access requests simultaneously. This means that, of the messages sent simultaneously, in the best case the base station can accept one message (by using the so-called "capture" effect). In the case of a collision, the sending mobile stations which do not receive channel reservation have to repeat their access requests. In order to reduce the risk of a further collision, the repeated transmission occurs after a given time interval which varies for each mobile station. It is well known that this time interval can vary randomly for each mobile station.

When all the free channel capacity in a radio communication system has been reserved for communication, overloading occurs if a further mobile station sends an access request to the base station. The latter receives the access request in itself from the mobile station but cannot comply with this request within a given predetermined time interval since there is no free channel capacity. The mobile station is then forced to repeat the access request in the same way as in the case of a collision, when the predetermined time interval has elapsed. This naturally leads to unnecessary extra channel loading, unnecessary delays in the mobile system and the risk of collisions occurring when transmissions are repeated.

US-A-5 166 929, for example, earlier disclosed a multiple-access protocol, in the case of which feedback concerning the status of an access channel is provided from the base station to the mobile stations. The mobile stations can thereby receive information concerning the result of an access request, for example, that a collision has occurred, and whether the next time slot is open for the sending of new access requests. This information makes it easier to determine when a new access request should be sent. A disadvantage of this protocol is that an overload situation is unmanageable. An access request received in the base station has to be repeated in a situation in which channels temporarily cannot be allocated in the base station owing to overloading, i.e. no channels are free.

A paper entitled "Medium Access Priority" by Motorola and presented at the standardizing meeting within ETSI STC SMG2 in Edinburgh on 7 March 1995 discusses a possible need of acceptance confirmation in the case of access requests from a mobile station to a base station. According to this paper, the mobile station is thus to be informed whether the access request has been correctly accepted in the base station. However, it is not mentioned as to how this confirmation of the access request is to be carried out.

#### DESCRIPTION OF THE INVENTION

The object of the present invention is to propose a process in a radio communication system for packet data transmission. The invention achieves this object by managing the access request from each station in a first group of mobile stations to a base station in a momentarily overloaded radio communication system which lacks free channel capacity for data transmission.

The object is achieved by the use of a message-synchronized ALOHA protocol with reservation. Packet data transmission is carried out via one or a plurality of time-divided channels between a base station and mobile stations. The mobile stations are arranged so as to send the access request to the base station during a reservation phase in a mobile radio system which uses this protocol. The base station is arranged so as to accept and comply with the access request from a first mobile station by sending thereto a channel reservation message comprising a channel reservation. As a result of this channel reservation, time slots for packet data transmission from the first mobile station to the base station are reserved. The base station is further arranged to accept access requests from a first group of mobile stations for which channel reservation momentarily cannot be carried out. In accordance with the process according to the invention, receipt of the access request from the first group of mobile stations is confirmed when the channel reservation cannot be carried out in the usual manner. Confirmation is sent in the form of access confirmations which are included in the same channel reservation message as said channel reservation for the first mobile station. The channel reservation message is received by each of the mobile stations in the first group. The mobile stations are actuated so that they await channel reservation without making repeated access requests. In connection with the

access confirmations, a queue of the mobile stations in the first group is arranged in the mobile radio system. Channel reservation for the mobile stations in the first group is carried out according to their position in this queue.

- 5 The invention also concerns a base station and a mobile station in a radio communication system for packet data transmission. The base station and mobile station according to the invention are arranged to implement the process according to the invention.
- 10 By means of the process according to the invention the load on an access channel to the base station can be decreased since the number of times which an access request is repeated in the system is reduced. This naturally reduces the average delay in transmission of data between a mobile station and a base station. Furthermore a shorter time interval can be predetermined before the access request is initialized
- 15 again, which means shorter average access delay.

#### DESCRIPTION OF THE DRAWINGS

- Figure 1 shows a mobile radio system with mobile stations and a base station; and
- 20 Figure 2 shows a channel reservation message from a base station to mobile stations.

#### PREFERRED EMBODIMENT

- In the following the invention will be explained in greater detail with reference to the drawings, in which Figure 1 shows a cell 1 in a mobile radio communication system with mobile stations MS1 - MS3 and a base station BS, for example a GSM system for communication via time-multiplex channels (TDMA).
- 25

- In the preferred embodiment a single communication channel Ch1 adapted for packet data transmission is used. This means that both data packets and associated control signals are transmitted via the same channel.
- 30

A mobile station MS1 initiates packet data transmission by sending an access request

to a base station BS via a data packet channel. This access request comprises identification of the transmitting mobile station, for example in the form of a random figure, possibly together with information about the desired class of service (for example, priority). The access request is dispatched randomly in order to reduce the risk of access requests from a plurality of mobile stations being sent simultaneously, but the request has to be sent within a given time interval which is reserved for this type of transmission. This time interval can, for example, consist of a time slot in a number of periodically recurring time frames. When the access request has been received and if channel capacity is available for this packet data transmission, the base station BS sends a channel reservation message 2 to the mobile station MS1. This channel reservation message includes a channel reservation whereby time slots for transmitting from the mobile station to the base station are allocated. The channel reservation further includes a reference to the access request which is accepted. The reference includes the same information which was received in the access request and a reference to the time frame or time slot in the time-divided channel Ch1 in which the access request was received. A mobile station MS1 thereby receives information as to whether the channel reservation is intended for this very mobile station. The mobile station MS1, from which the access request originates, thereby receives information that it has been allocated time slots for packet data transmission.

During the time in which the mobile station MS1 carries out packet data transmission on the reserved channel, it is important that the other mobile stations MS2, MS3 do not attempt to initiate transmission on the channel. Access requests from the mobile stations are therefore only permissible when the base station BS reports that one or a plurality of time slots are free for this purpose. The base station indicates that it is possible to send access requests by placing a flag on the channel to the mobile stations MS1 - MS3. When packet data transmission in the allocated time slots has terminated, the base station indicates that a number of time slots in the channel from the mobile stations to the base station are again open for access requests. Access requests can again be sent randomly to the base station.

During the time slots which are free between the transmission of different data packets from mobile stations to the base station, i.e. open for access requests, a

plurality of mobile stations MS1 - MS3 can send an access request to the base station BS. If transmission occurs at the same time for some of the mobile stations MS1 - MS3, a collision occurs between the transmissions. In this collision situation, the base station BS is unable to interpret the message from more than at most one  
5 of the stations in question and the transmission of the access request therefore has to be repeated.

If a plurality of mobile stations MS1 - MS3 send access requests without overlapping to a base station, the channel reservation can only be carried out for one or more of  
10 these stations. When a channel reservation is carried out for a first mobile station MS1, the other mobile stations MS2, MS3 have to await free channel capacity in spite of the fact that the access requests from these stations have been received correctly in the base station BS. In re-transmission situations access requests can  
15 also be received randomly between different transmissions included in a sequence relating to the same data packet. This depends on whether it is desired to use the gaps in such a sequence so that access requests can be received. According to the invention, in order to prevent a new wave of access enquiries from these mobile stations MS2, MS3, each access request correctly received in the base station (up to a given limit) is usually responded to. Access confirmations 4, 5 are accordingly  
20 sent to at least a number of the stations MS2, MS3 which do not immediately have a channel reservation 3 accepted. These access confirmations are included in a channel reservation message 2 comprising a channel reservation 3 to the mobile station MS1 which is allocated a channel in response to the access request. Such a channel reservation message 2 is shown in Figure 2. Since this channel reservation  
25 3 is sent in a message 2 in a format which is common to all the control messages, for example comprising four time slots, and since given control data can be used together, a limited number of access confirmations 4, 5 can be included in the same message 2.

30 These access confirmations consequently do not give rise to increased channel loading.

The confirmation of correctly received access requests from a number of mobile



stations enables a queue of mobile stations awaiting their turn for packet data transmission to be arranged in the mobile radio system.

5 When packet data transmission is used in the GSM system a limited number of access confirmations can be included in a message with channel reservation. As concerns the reference to the time frame when the enquiry from a mobile station was received, this access confirmation is carried out in two ways. The first way is to indicate the number of the time frame (related to a given multiframe structure which is used in the system), in the same way as in the channel reservation 3, in  
10 part of the channel reservation message 2. The other way is, instead, to use a reference relating to the time frame which is given in the usual channel reservation message.

15 It will be appreciated that the invention is not restricted to the above-described embodiment but encompasses any embodiment which lies within the scope of protection of the following claims.

## CLAIMS

1. Process for a radio communication system which is arranged for packet data transmission via at least one time-divided channel (Ch1) between a base station (BS) and mobile stations (MS1 - MS3), according to a message-synchronized ALOHA protocol with reservation, the mobile stations (MS1 - MS3) being arranged to send  
5 access requests to the base station (BS), which is arranged to receive and comply with access requests from at least a first mobile station (MS1) by sending thereto a channel reservation message (2) comprising a channel reservation (3), whereby time slots are reserved for packet data transmission between the first mobile station (MS1) and the base station (BS), and to receive access requests from a first group of mobile  
10 stations (MS2, MS3) for which channel reservation momentarily cannot be carried out, characterized in that:
  - the reception of access requests from the first group of mobile stations (MS2, MS3) is confirmed in the form of an access confirmation (4, 5) from the base station (BS) to each of the mobile stations (MS2, MS3) included in the first group;
  - 15 - these access confirmations (4, 5) are included in the channel reservation message (2) with the channel reservation (3) to the first mobile station (MS1);
  - the first group in the radio communication system associated with the access confirmations are arranged in a queue, a queue position being allocated to each of the mobile stations in this group; and
  - 20 - channel reservation is carried out for the mobile stations according to their queue positions.
2. Process according to Claim 1, characterized in that:
  - the channel reservation message (2) is read by all the mobile stations from  
25 which access requests are received in the base station; and
  - access confirmations (4, 5) included in this channel reservation message (2) are received in the mobile stations (MS2, MS3), whereby the latter are actuated so as to await channel reservation without making repeated access requests.
- 30 3. Process according to either of the preceding claims, characterized in that:
  - a first reference is supplied in the channel reservation (3) to the first mobile

station, which first reference refers to a first time slot in the time-divided channel (Ch1), in which first time slot the access request from the first mobile station (MS1) was received in the base station (BS); and

- a second reference is supplied in each access confirmation (4, 5), which  
5 second reference refers to a second time slot in the time-divided channel (Ch1), in which second time slot access requests were received in the base station (BS) from the respective mobile station (MS2, MS3) for which the access confirmations are intended.

10 4. Process according to claim 3, characterized in that:

- the second reference is made up of the number of time slots between the first time slot and the second time slot.

5. Process in the case of a base station in a radio communication system which is arranged for packet data transmission, via at least one time-divided channel,  
15 between a base station and mobile stations, according to a message-synchronized ALOHA protocol with reservation, comprising the following steps:

- receiving access requests from the mobile stations;  
- complying with the access request from at least a first mobile station by  
20 sending a channel reservation thereto, whereby time slots are reserved for packet data transmission between the first mobile station and the base station;

- giving access confirmations to each mobile station in a first group of mobile stations on receipt of access requests from the first group of mobile stations for which channel reservation momentarily cannot be carried out;

- sending these access confirmations in the same message as the channel  
25 reservation for the first mobile station;

- arranging, in association with the access confirmations, in the radio communication system a queue of the mobile stations in the first group, a queue position being allocated to each mobile station; and

- carrying out channel reservation for the mobile stations according to their  
30 queue positions.

6. Base station in a radio communication system, which is arranged for packet data transmission via at least one time-divided channel (Ch1) between the base

station (BS) and mobile stations (MS1 - MS3), according to a message-synchronized ALOHA protocol with reservation, the mobile stations (MS1 - MS3) being arranged to send access requests to the base station (BS), which is arranged to receive and comply with access requests from at least a first mobile station (MS1) by sending thereto a channel reservation message (2) comprising a channel reservation (3), whereby a number of time slots are reserved for packet data transmission between the first mobile station (MS1) and the base station (BS), and to receive access requests from a first group of mobile stations (MS2, MS3) for which channel reservation momentarily cannot be carried out, characterized in that:

- 5 - the base station (BS) is arranged to give access confirmations (4, 5) to each of the mobile stations (MS2, MS3) which are included in the first group and from which access requests have been received;
- the base station (BS) is arranged to include these access confirmations in the same channel reservation message (2) as said channel reservation (3) for the first mobile station (MS1);
- 15 - the base station (BS) is adapted to arrange a queue of the mobile stations (MS2, MS3) in the first group, a queue position being allocated to each mobile station; and
- the base station is arranged to carry out channel reservation for the mobile stations in the first group according to their queue positions.

7. Mobile station in a radio communication system, which is arranged for packet data transmission via at least one time-divided channel (Ch1) between the base station (BS) and mobile stations (MS1 - MS3), according to a message-synchronized ALOHA protocol with reservation, the mobile stations being arranged to send access requests to the base station, which is arranged to receive and comply with access requests from at least a first mobile station (MS1) by sending thereto a channel reservation message (2) comprising a channel reservation (3), whereby time slots are reserved for packet data transmission between the first mobile station (MS1) and the base station (BS), and to receive the access requests from at least a second mobile station (MS2) for which channel reservation temporarily cannot be carried out, characterized in that:

- a mobile station (MS2) which has sent the access request to the base station

is arranged to read each channel reservation message (2) in the time-divided channel (Ch1); and

- the mobile station (MS2) which has sent the access request to the base station (BS) is arranged to receive an access confirmation (4) in this channel reservation message (2) when the channel reservation (3) does not concern this mobile station (MS2), whereupon the mobile station (MS2) is actuated to await channel reservation without further access requests being sent.

5

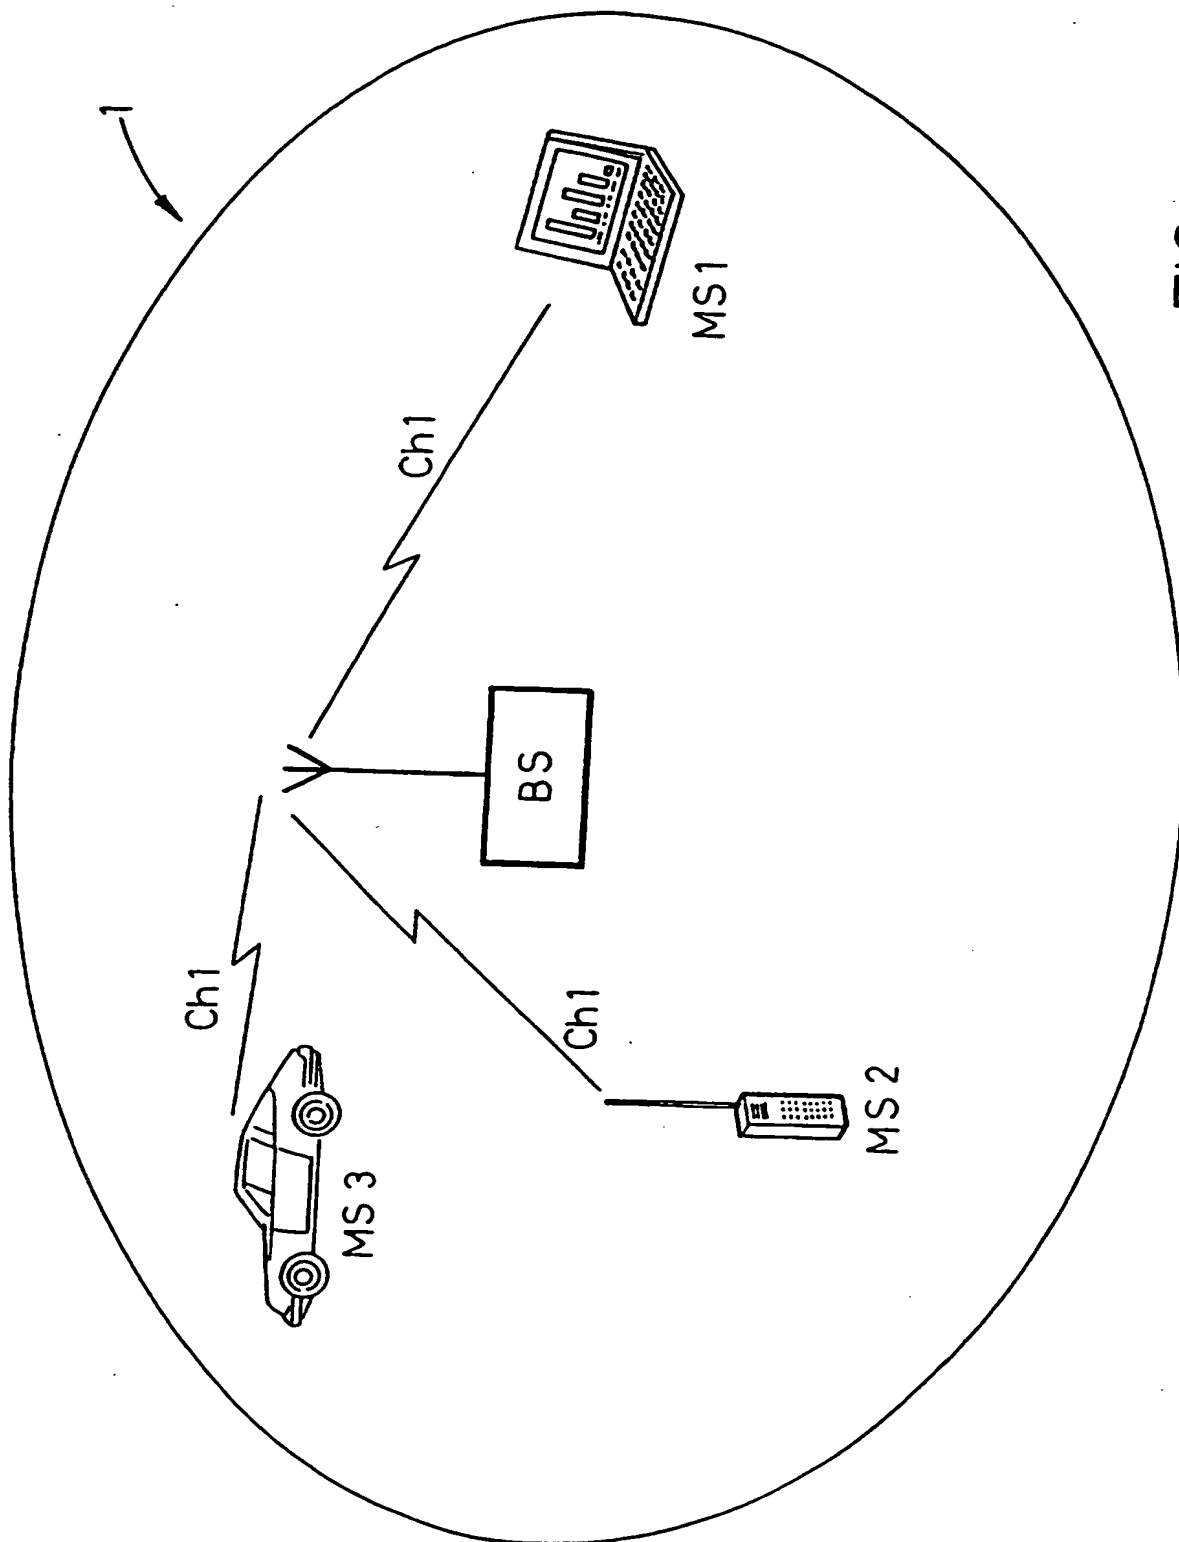


FIG. 1

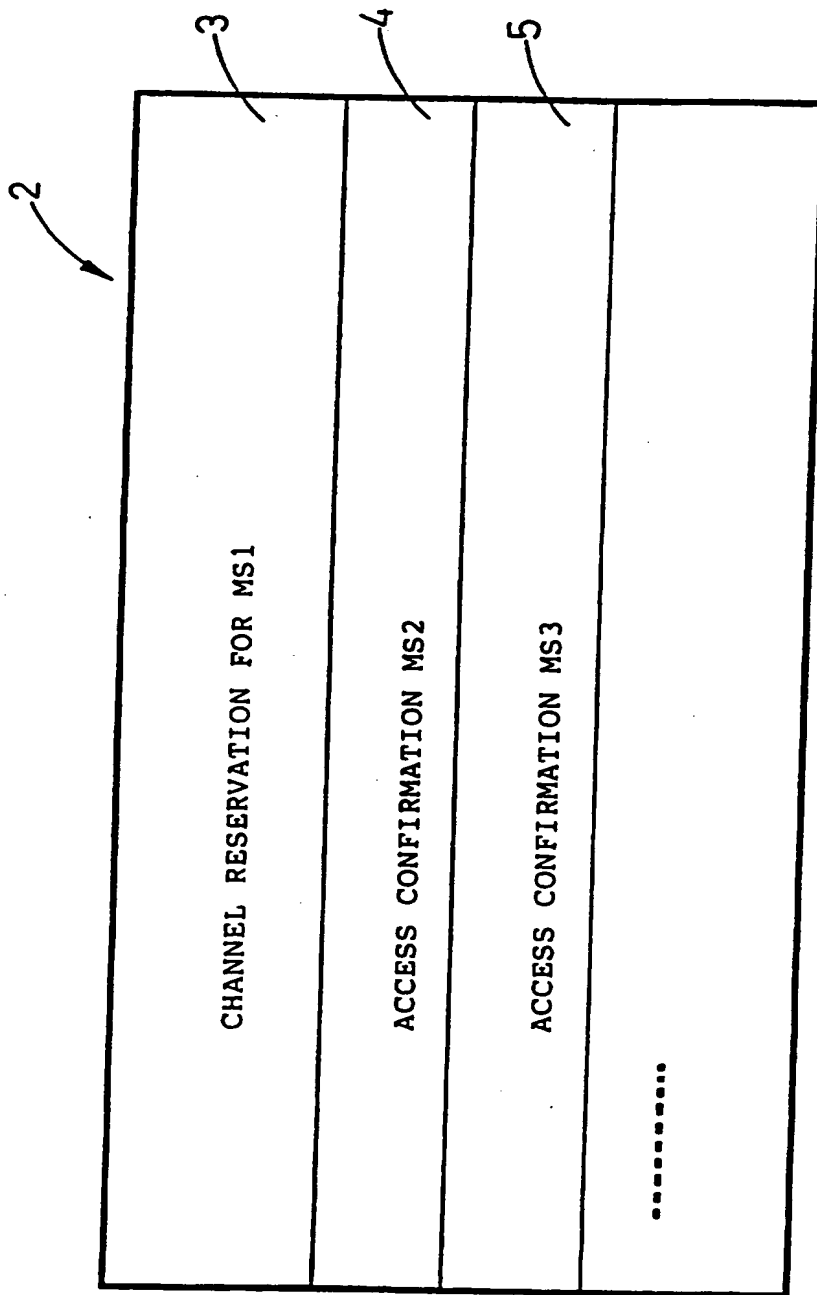


FIG. 2

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 96/00299

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04Q 7/38

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9410767 A1 (TELEFONAKTIEBOLAGET LM ERICSSON), 11 May 1994 (11.05.94), page 6, line 25 - page 7, line 27, abstract --	1-7
A	GB 2281470 A (MOTOROLA LIMITED), 1 March 1995 (01.03.95), abstract --	1-7
A	Patent Abstracts of Japan, Vol 17, No 434, E-1412, abstract of JP, A, 50-91009 (NIPPON TELEGR & TELEPH CORP), 9 April 1993 (09.04.93), see abstract --	1-7

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

\* Special categories of cited documents

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

30 May 1996

Date of mailing of the international search report

17 -07- 1996

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Henrik Fehniger

Telephone No. +46 8 782 25 00



# INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 96/00299

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5166929 A (WING F. LO), 24 November 1992 (24.11.92), abstract  -- -----	1-7

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

01/04/96

International application No.  
PCT/SE 96/00299

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
WO-A1-	9410767	11/05/94	NONE		
GB-A-	2281470	01/03/95	CN-A-	1104402	28/06/95
			FR-A-	2705181	18/11/94
US-A-	5166929	24/11/92	CA-A-	2043705	19/12/91
			EP-A,A,A	0462572	27/12/91